

## Air Quality Monitor Instruction Manual



### Product Specifications

Detection method for CO<sub>2</sub> : Infrared (NDIR)  
Detection method for PM: laser scattering  
Sampling time: 1.5 seconds  
Detection temperature: -10°C to 50°C;  
Relative humidity: 20% - 85%  
Storage temperature: -10°C to 60°C;  
Concentration unit for CO<sub>2</sub>:PPM  
Concentration unit for PM: ug/m<sup>3</sup>  
Power source: Lithium battery with 2000 mAh capacity;  
5V DC power charging with micro USB port  
Product Size: 267\*140\*30mm  
Product weight: 300g

### Product Description

This product is an air quality monitor that detects Carbon dioxide (CO<sub>2</sub>),Particulate Matter (PM<sub>2.5</sub>),Temperature and Humidity. it combines sensors real-time monitoring of Carbon dioxide (CO<sub>2</sub>), PM<sub>2.5</sub>,temperature and humidity on its display.

### Considerations

Please read the instructions carefully before using this device.  
Please keep the manual handy for quick reference and troubleshooting.

### Precautions

Avoid covering the air intake areas during use to avoid inaccurate measurements.  
Avoid use of solvents to clean the product as residual fumes will skew air quality readings.  
Avoid water or other liquids near the product to avoid electrical damage.  
Do not allow unauthorized modification or repair of this product.

### Features:

- Big screen display
- Support test variables:Carbon dioxide(CO<sub>2</sub>),PM<sub>2.5</sub>, temperature and humidity
- Support CO<sub>2</sub> exceeding alarm
- CO<sub>2</sub> alarm threshold can be set


### CO<sub>2</sub> indicator :

Green: 400ppm to 1000ppm  
Yellow: 1001ppm to 2000ppm  
Red: 2001ppm to 5000ppm

### PM<sub>2.5</sub> indicator:

Green: 0~74 ug/m<sup>3</sup>  
Yellow: 75~299 ug/m<sup>3</sup>  
Red: 300~999 ug/m<sup>3</sup>

### Key operation

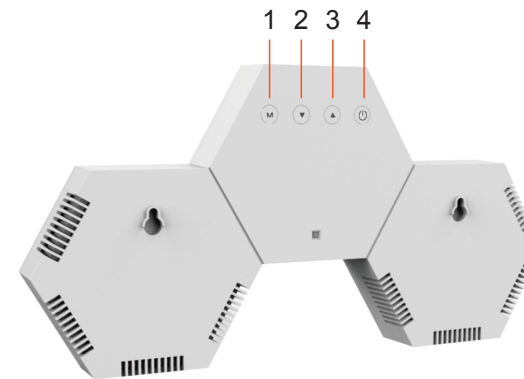

- 1) Set button, press or click to enter setting
- 2) Down button, click to adjust
- 3) Up button, click to adjust
- 4) Power ON/OFF button, press or click to turn on/off the device

### Time setting

After turn on, the device auto accesses the interface which can show CO<sub>2</sub> current value, PM<sub>2.5</sub>, temperature, humidity, and time. In this state, when you long-press set button, the digits of hour will flash, press up button to increase digits or press down button to decrease digits, and press set button to confirm and switch to next option.

### CO<sub>2</sub> alarm threshold Setting

After setting time, the digits of CO<sub>2</sub> will flash, then you can press up button to increase CO<sub>2</sub> alarm threshold, or press down button to decrease CO<sub>2</sub> alarm threshold. (CO<sub>2</sub> alarm threshold can be set to 800ppm, 900ppm, 1000ppm, 1100ppm, 1200ppm, 1300ppm, 1400ppm, 1500ppm, 1600ppm, 1700ppm, 1800ppm, 1900ppm, 2000ppm). After setting CO<sub>2</sub> alarm threshold, press set button to confirm setting.

### Turn off/on CO<sub>2</sub> alarm sound

Single press set button, to turn on/turn off the alarm sound.

### Installation Notes

- 1)The positioning sticker is attached to the position to be installed.

- 2)Punch a 6mm hole at the 2 marked positions of the positioning sticker and drive the rubber plug
- 3)Drive in the screws, and pay attention to about 4mm exposed. Then hang up the device.

### Working method

Under normal working conditions, we suggest don't do any setting. You can test the current CO<sub>2</sub>/PM<sub>2.5</sub> value and temperature and humidity. (Factory default CO<sub>2</sub> alarm threshold is 1000PPM)

### Automatic calibration

During the first time use, please turn on device and keep it working for more than 24 hours, the device will automatically calibrate. (Do not power off and restart halfway when calibration)

### About Charging

When low battery icon is displayed, the device needs to be charged.  
Insert the included or another compatible micro USB charging cable into the device.  
Attach the other end to a USB DC charger (such as a smart phone charger that outputs DC 5V at >=1000mA. Fully charge for at least 2-3 hours before use.  
Avoid charging with a USB computer port which only outputs 500mA.

### Technical parameter

- 1) Input voltage: DC5V 1000mA
- 2) CO<sub>2</sub> test measurement range: 400ppm-5000ppm
- 3) PM<sub>2.5</sub> range: 0~999 ug/m<sup>3</sup>
- 4) CO<sub>2</sub> test accuracy:  
400~1000ppm, deviation : ±50ppm+3%reading;  
above 1000ppm, deviation : ±5%
- 5) CO<sub>2</sub> display resolution: 1ppm
- 6) Temperature measurement range: -10.0°C~+50.0°C
- 7) Temperature accuracy: ±1.0°C (0°C~40°C)
- 8) Humidity measurement range: 20%~85%

### Product List

- Device\*1
- Manual \*1
- Positioning sticker \*1
- USB cable \*1
- Screw \*2
- Rubber stopper \*2

